

PLATO SERIES

LED TRI-PROOF LIGHT

25W-65W



Features


- ⊙ Tool-free assembly; endcap is knock-down design for fast & easy wire connection;
- ⊙ With wire through cables for series connection, DALI function is available;
- ⊙ Power adjustable via DIP switch : 50% ,75% ; 100% for better energy-saving
- ⊙ With breather to balance the air pressure outside and inside of lamp body;
- ⊙ With 140-150lm/W, 75° 140° beam angle is available; IP65 ,K08 , ENEC approved;
- ⊙ Easy mounting clip;

Application

Widely used in all types of production line, parking lot, factory, freight yard shopping mall, and supermarket. It can replace traditional tri-proof lamp



Plato Series Technology

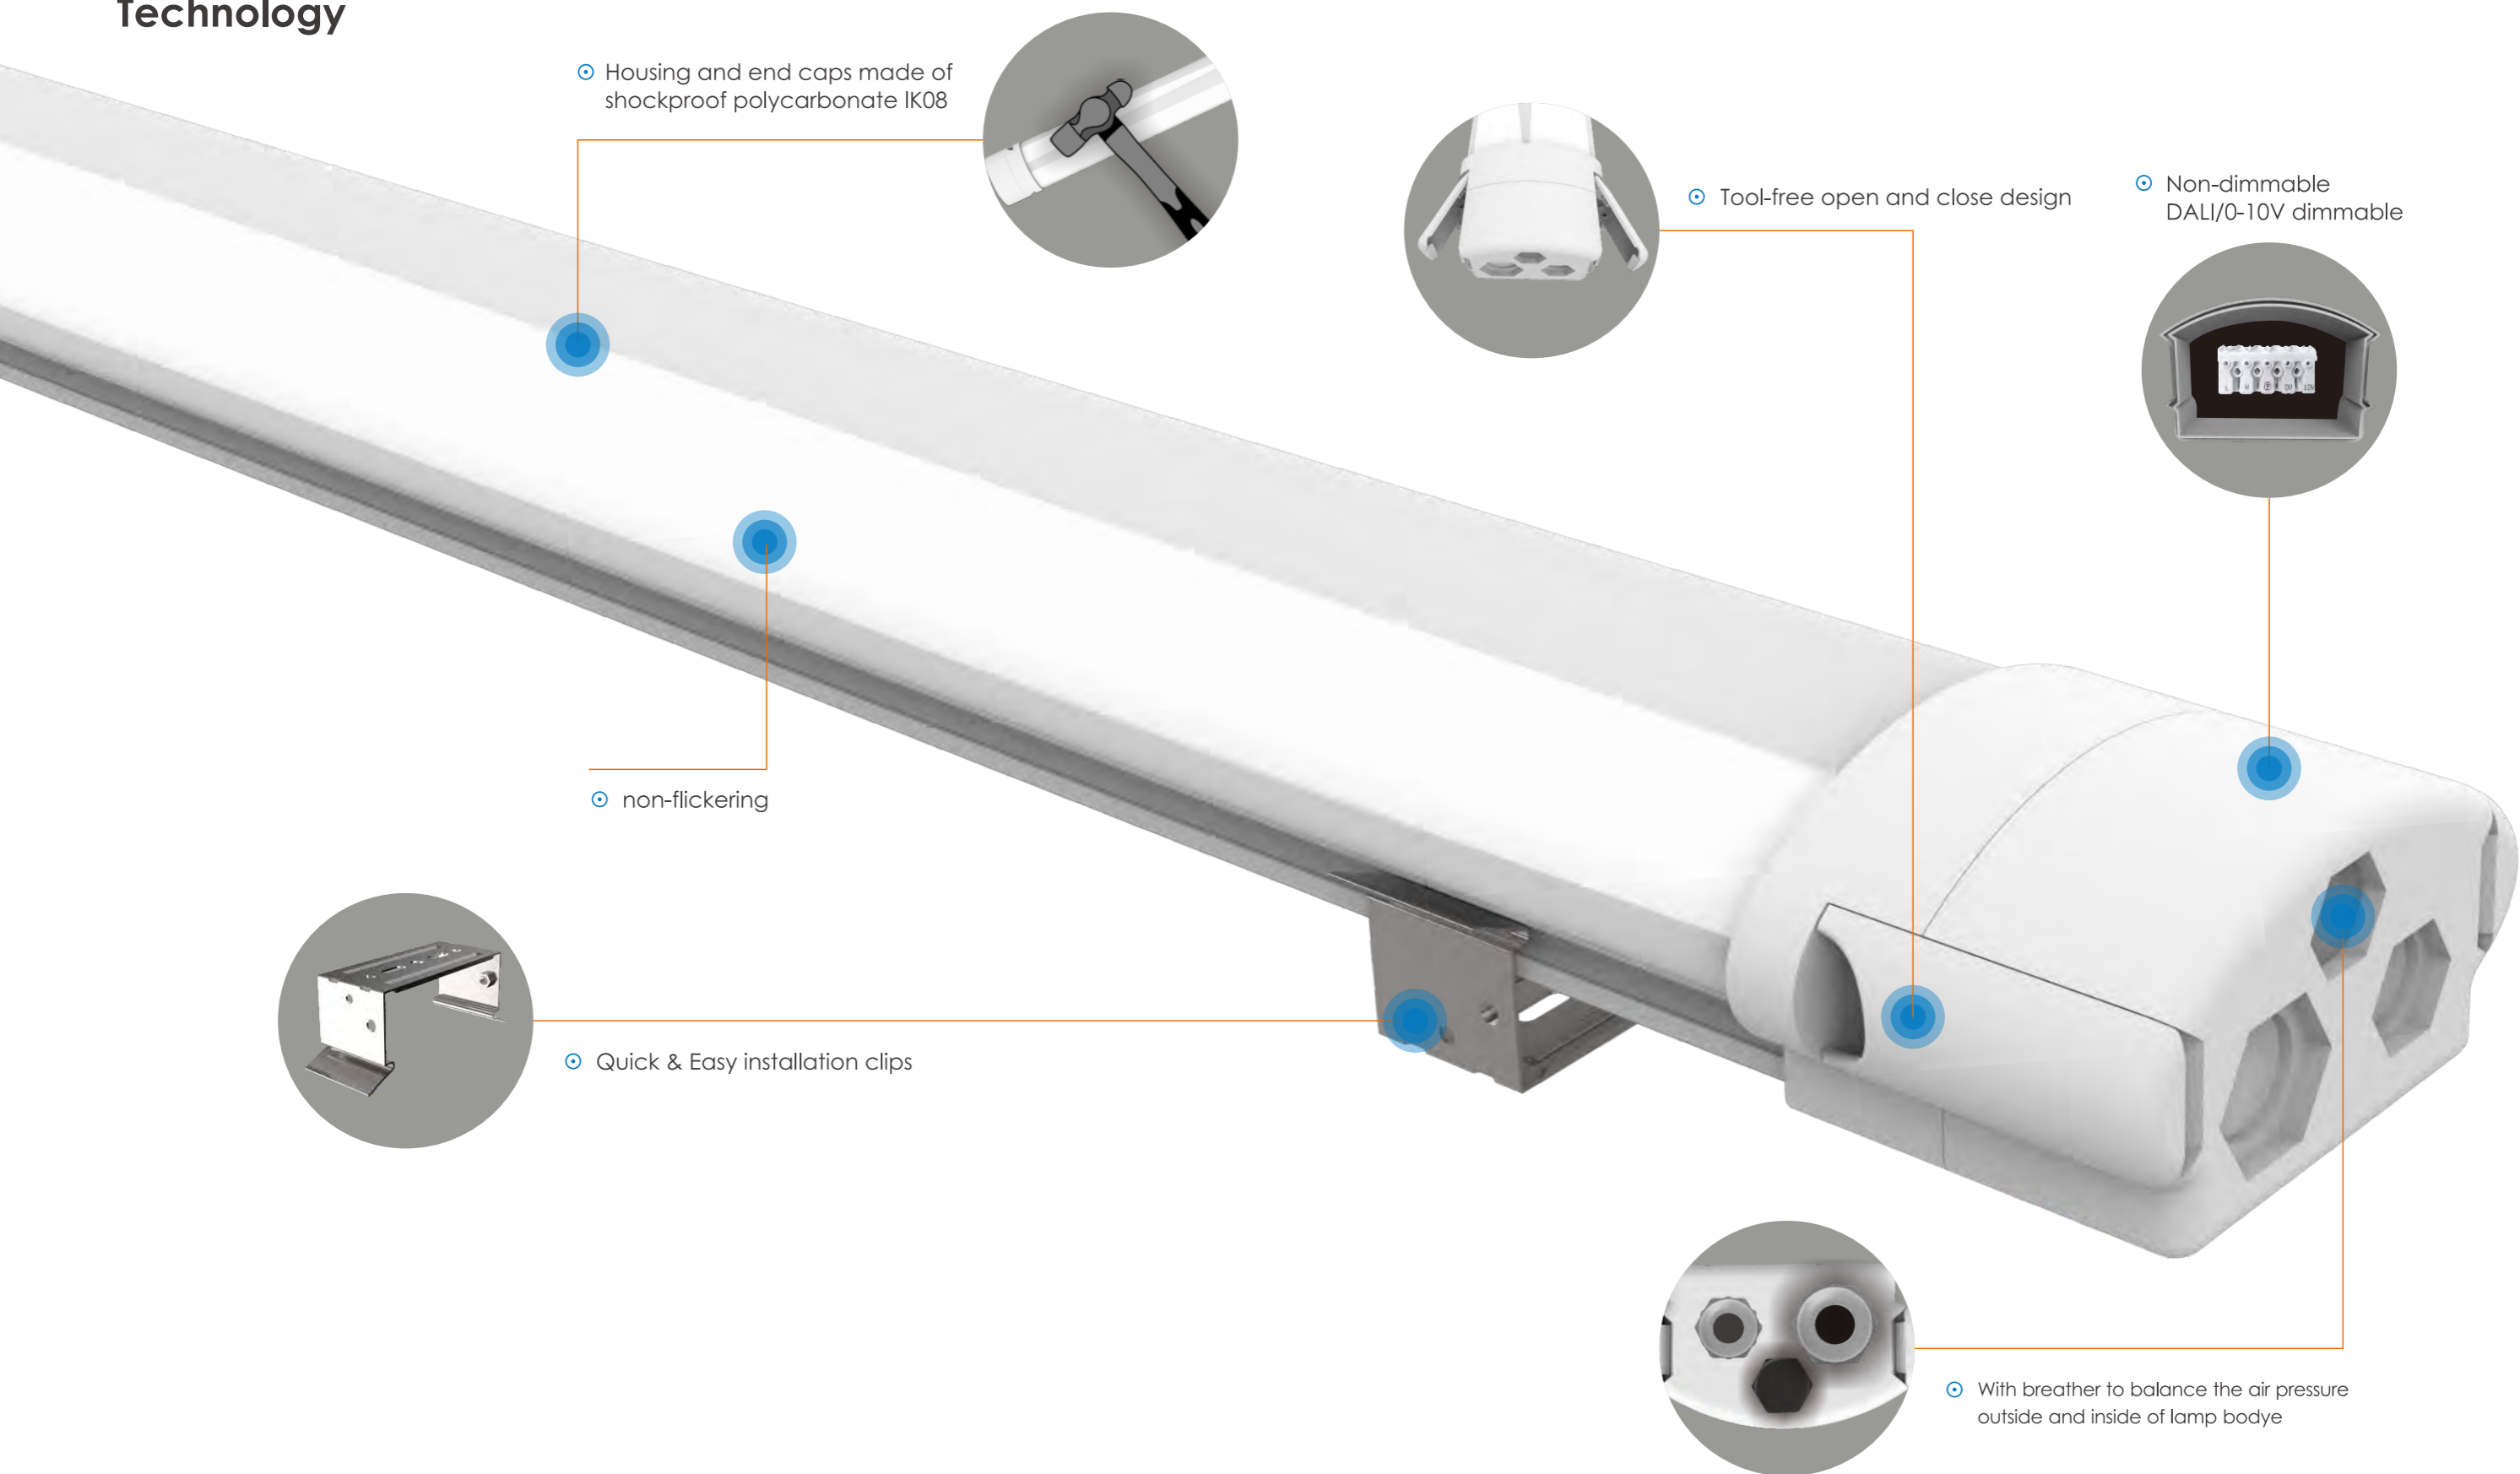

⦿ Housing and end caps made of shockproof polycarbonate IK08

⦿ Tool-free open and close design

⦿ Non-dimmable DALI/0-10V dimmable


⦿ non-flickering

⦿ Quick & Easy installation clips

⦿ With breather to balance the air pressure outside and inside of lamp body


Photometrics

- ⊙ Luminous efficiency up to 140-150lm/W
- ⊙ Colour rendering index Ra 80
- ⊙ Symmetrical light distribution
- ⊙ LED rated life 50,000 h (L80, B10)
- ⊙ Replacement for fluorescent lamps

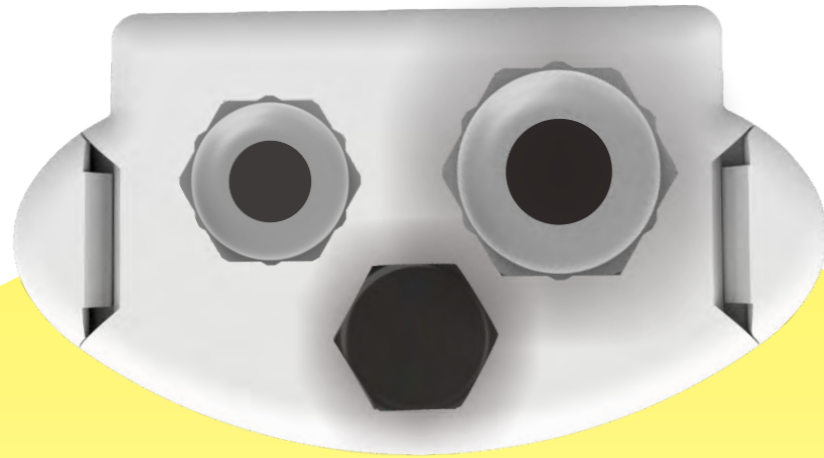


Technical Parameter

Model No.	System Power	Length(mm)	Luminous Efficiency	Structure Description	Weight(kg)
MS-LL031546-50BF	46W-65W	1500	140-150lm/W	PC cover + extruded aluminium	2.4
MS-LL031546-40BF	46W-65W	1500	140-150lm/W	PC cover + extruded aluminium	2.4
MS-LL030825-50BF	25W	800	140-150lm/W	PC cover + extruded aluminium	1.7
MS-LL030825-40BF	25W	800	140-150lm/W	PC cover + extruded aluminium	1.7




Package Information

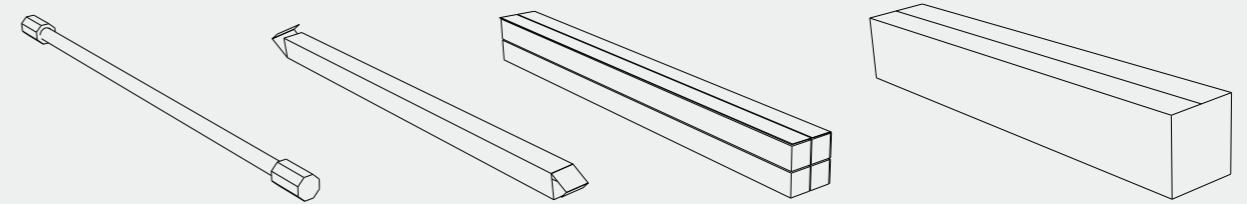

Length(mm)	Carton size (outer box)(mm)	Qty per carton	Packing volume (outer box)
1500	1638X306X220mm	4pcs	0.11
800	938X306X220mm	4pcs	0.063

Product Size

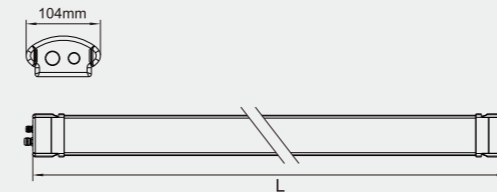

Distribution Curve (cd)

