


OMNI SERIES

LED TRI-PROOF LIGHT

25W-65W

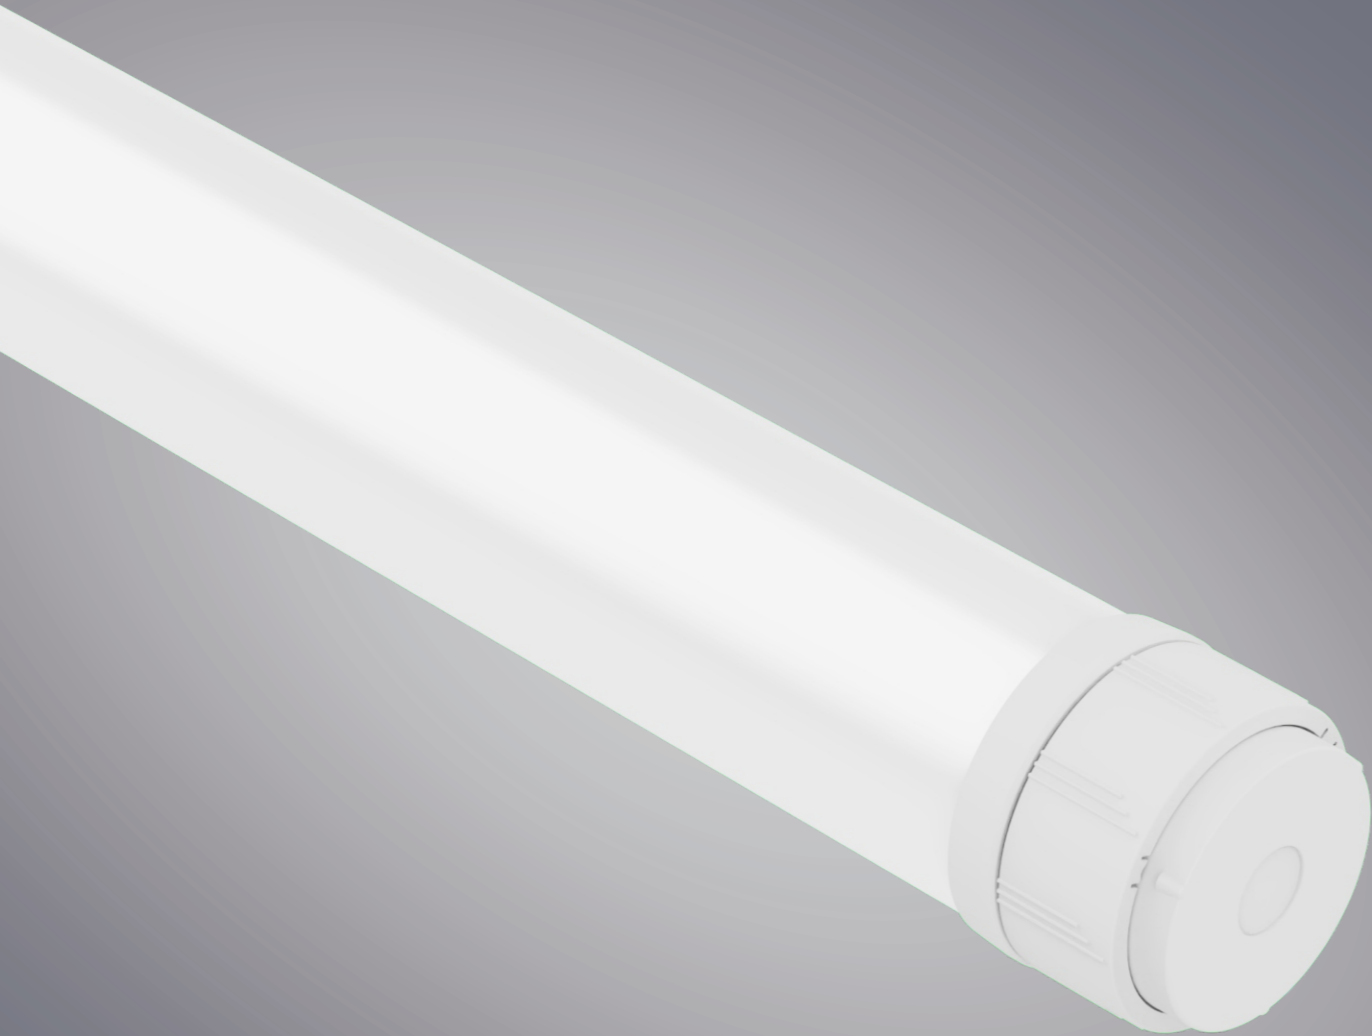


Features

- ⊙ Tool-free assembly
- ⊙ Waterproof Protection: IP65
- ⊙ Impact protection: IK08
- ⊙ With 3*1.5mm² go through wiring for series connection ;
- ⊙ Multi-function: Blue-tooth, motion sensor for choice
- ⊙ High efficient up to 140lm/W
- ⊙ 360°beam angle


Application

Widely used in all types of production line, parking lot, factory, shopping mall, and supermarket. It can replace traditional tri-proof lamp

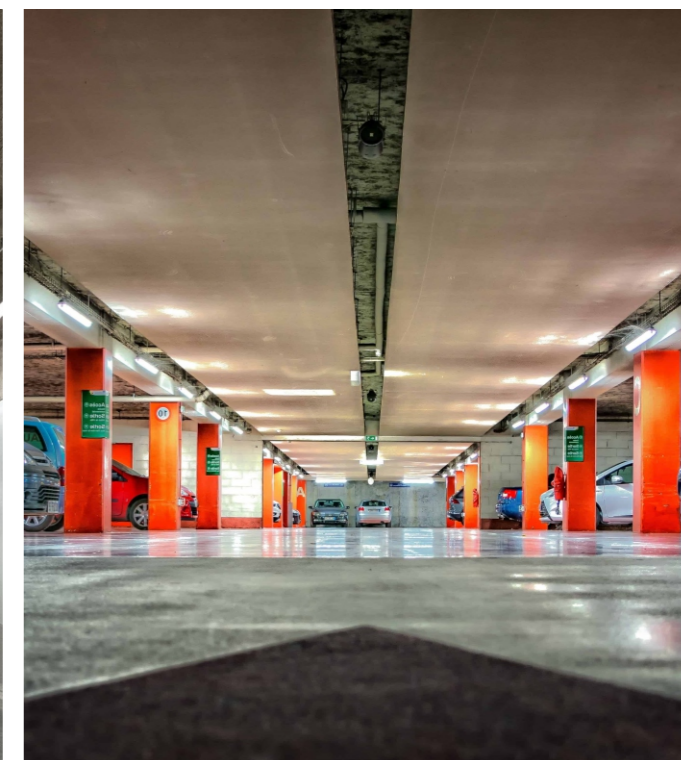


Omni Series Technology


⦿ Housing and end caps made of shockproof polycarbonate IK08

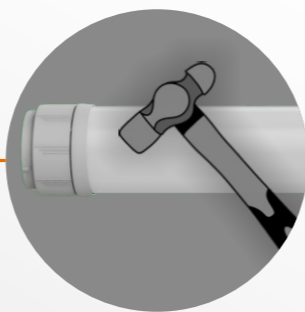


⦿ Simple connection by push-on connector

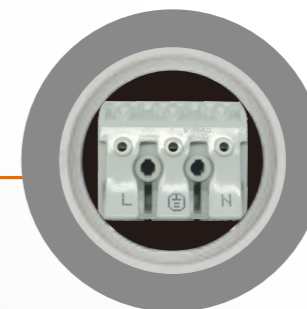

⦿ Tool-free open design

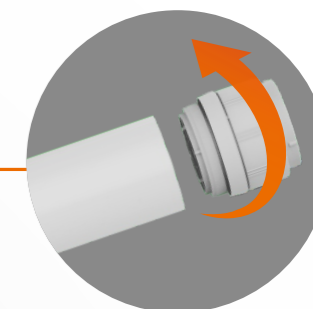


⦿ flicker free

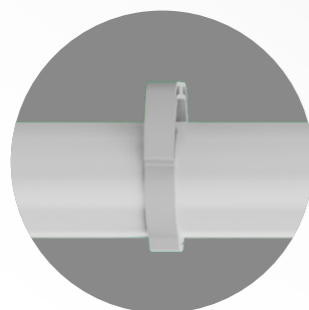


⦿ Quick & Easy installation clips

⦿ 360° beam angle

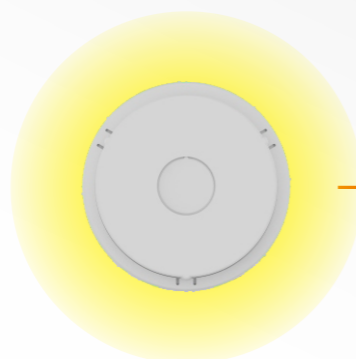


⦿ With 3*1.5mm² go through wiring for series connection

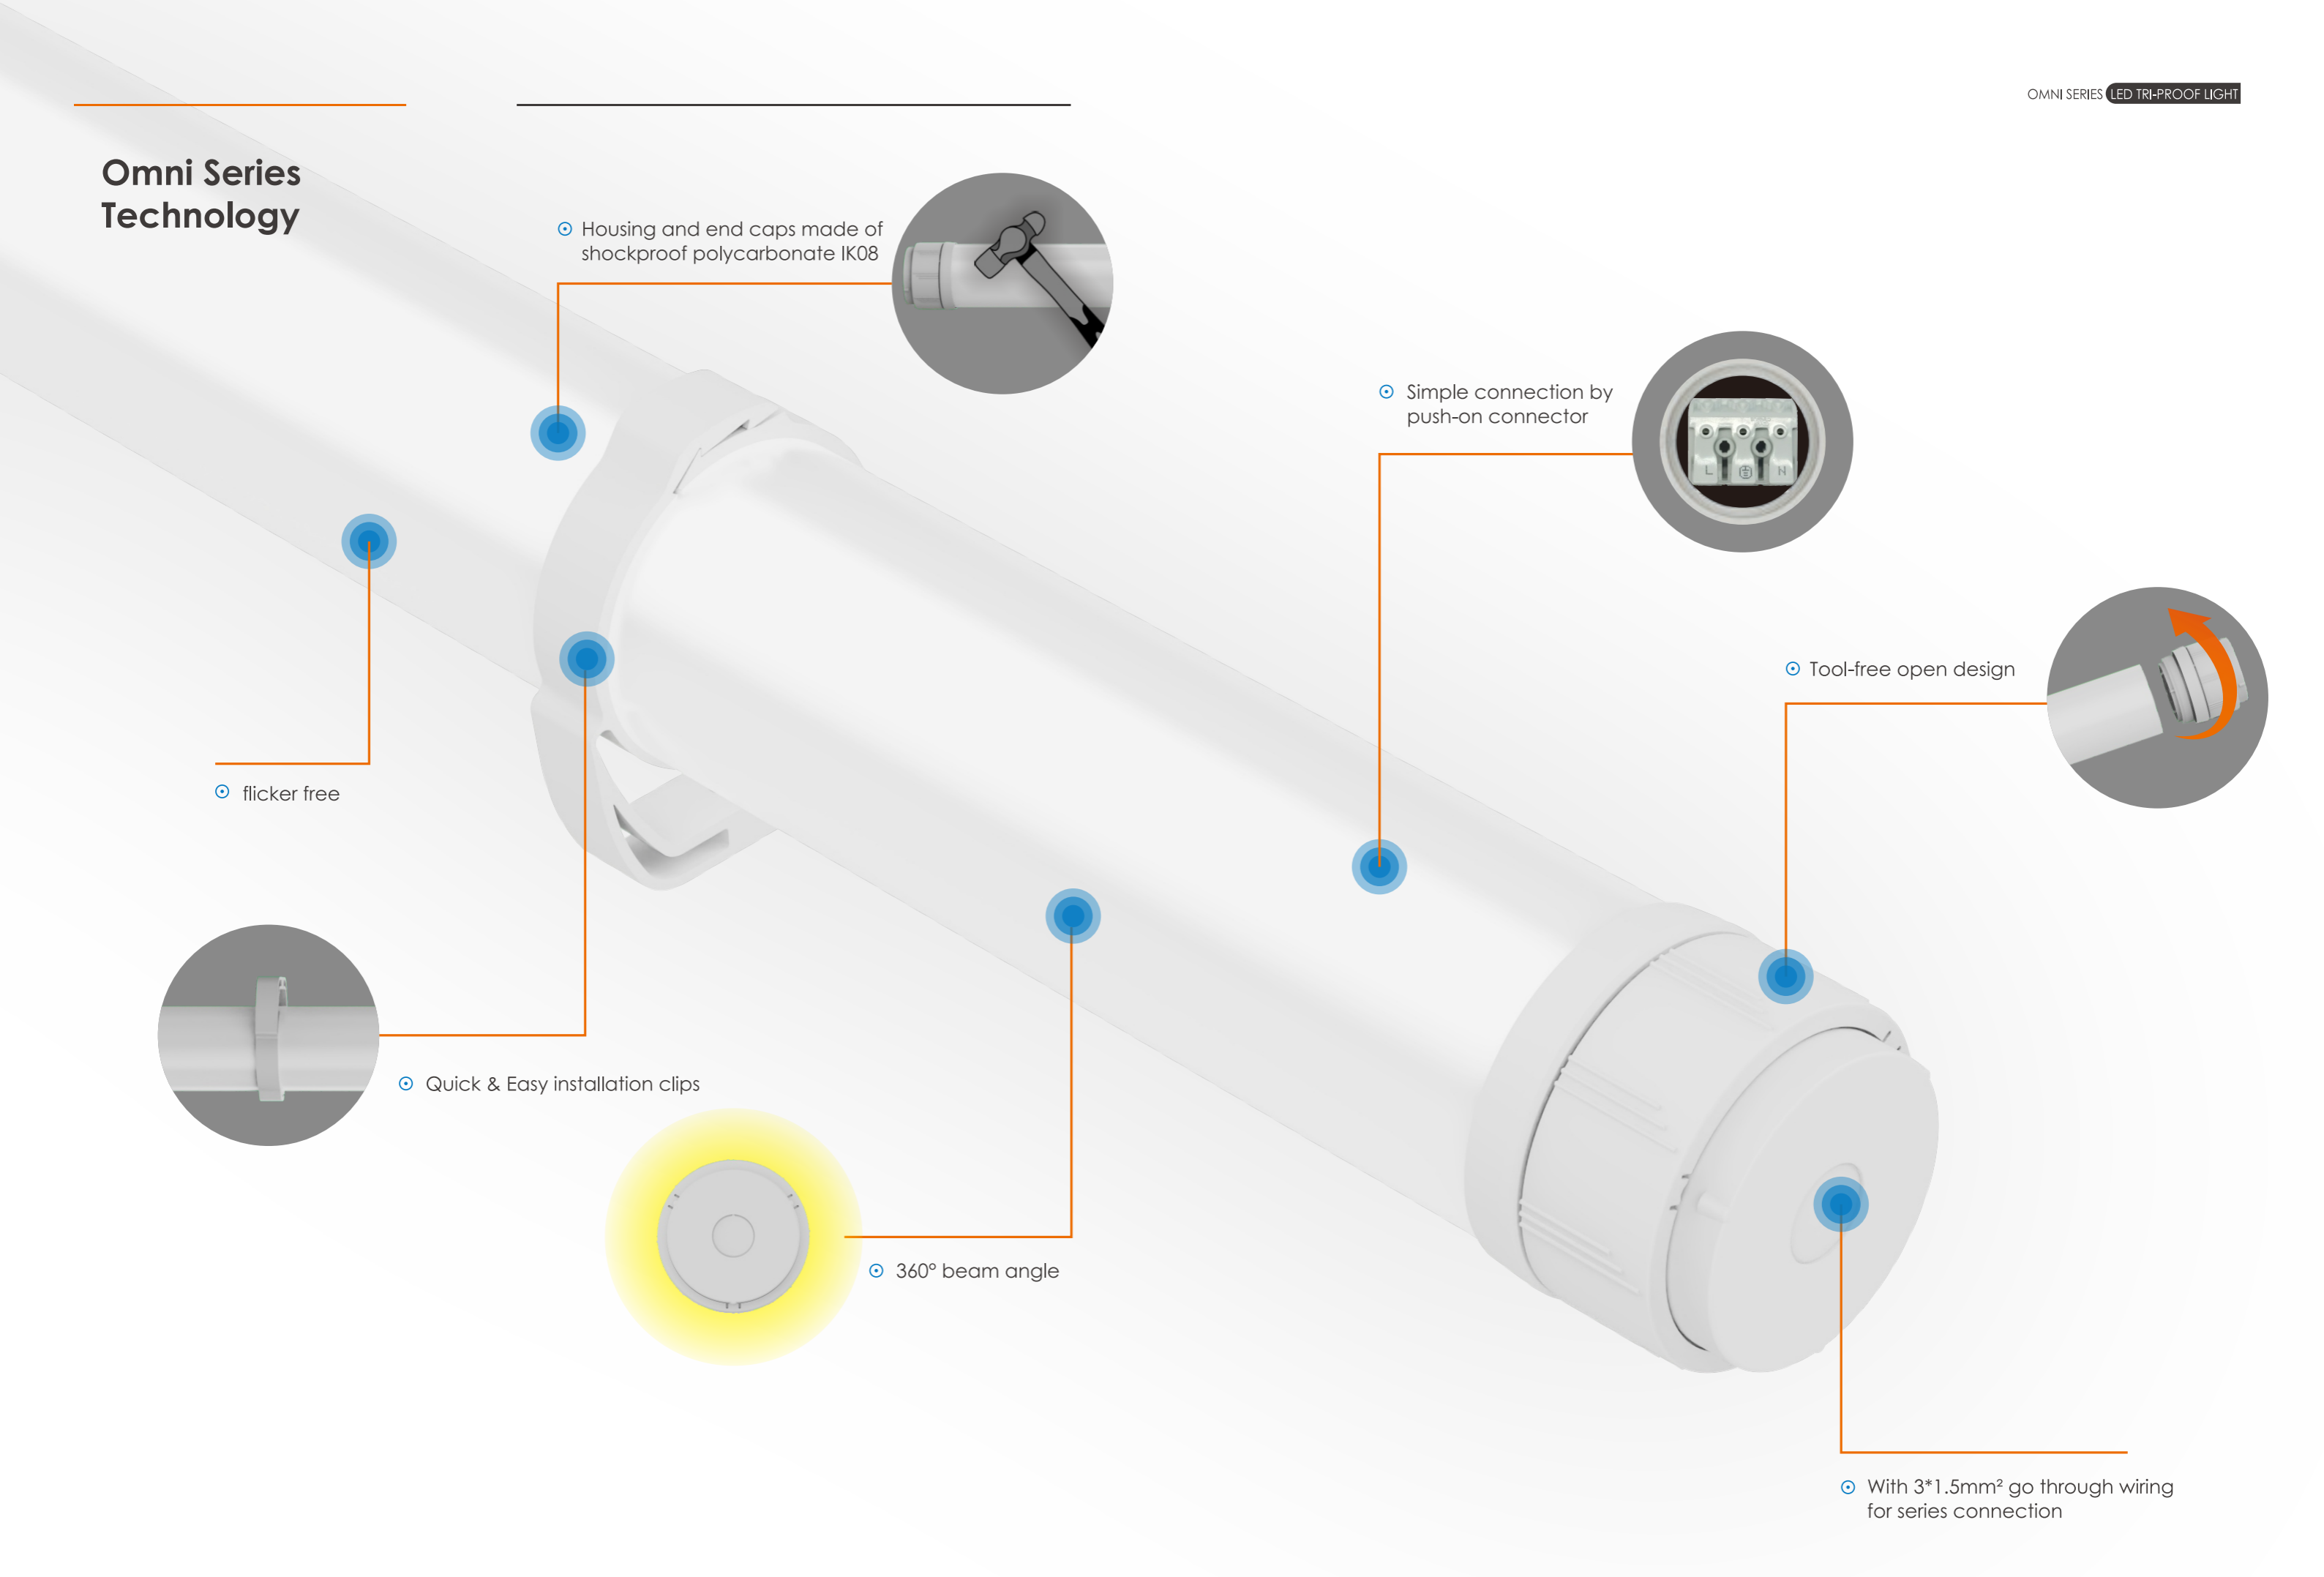

Photometrics


- ⊙ Luminous efficiency up to 140 lm/W
- ⊙ Colour rendering index Ra 80
- ⊙ 360° wide beam angle
- ⊙ LED rated life 50,000 h (L80, B10)
- ⊙ Replacement for fluorescent lamps

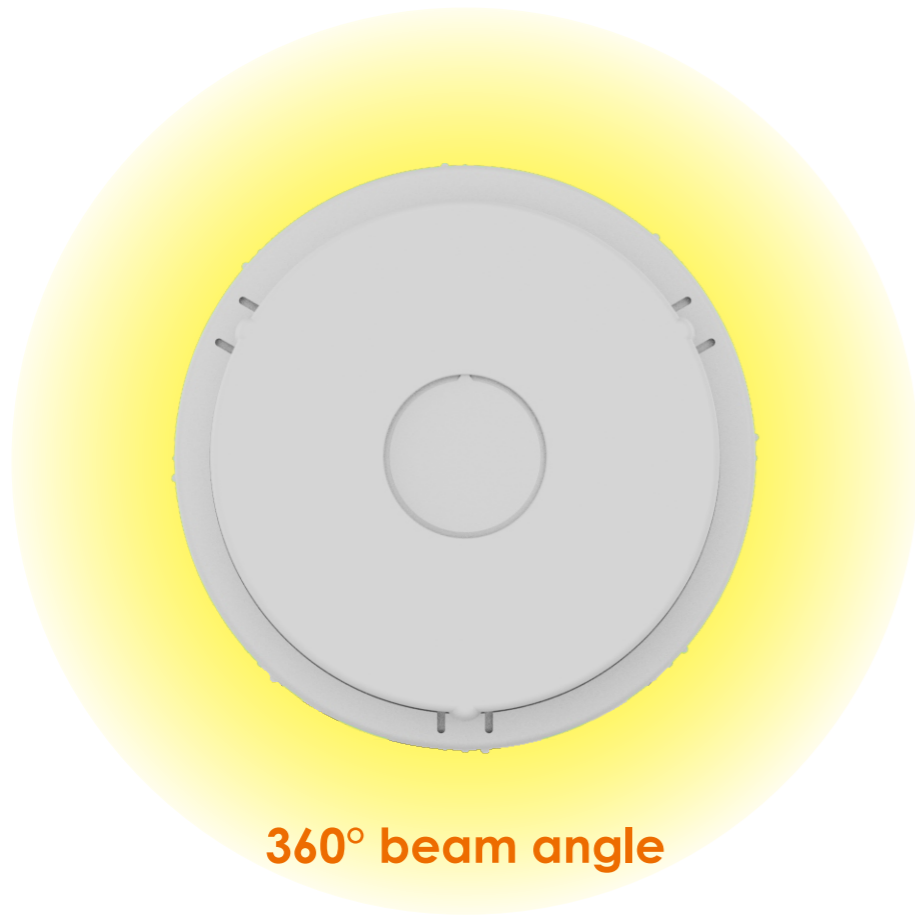

360° beam angle




Normal products with
120° ~140° beam angle

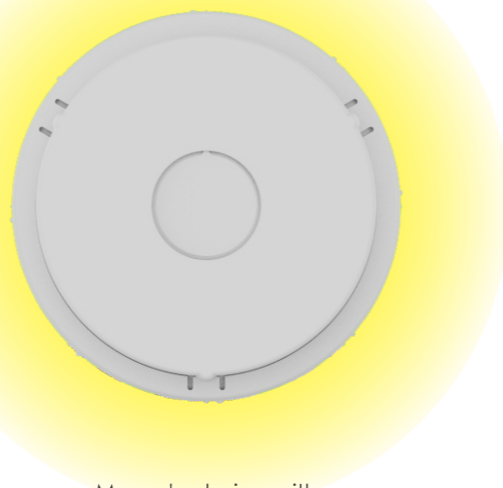


Mason's design with
360° beam angle

Technical Parameter

Model No.	System Power	Length(mm)	Luminous Efficiency	Weight(kg)
MS-LL0010625-XXBF-XX	25W	600mm	140lm/W	0.7
MS-LL0011250-XXBF-XX	50W	1200mm	140lm/W	1.28
MS-LL0011565-XXBF-XX	65W	1500mm	140lm/W	1.6



Package Information

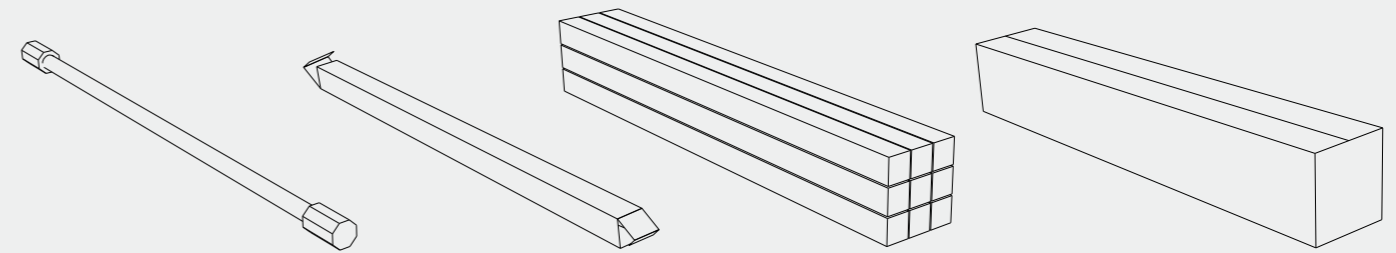

Length(mm)	Carton size (outer box)(mm)	Qty per carton	Packing volume (outer box)
600	795*420*425	9pcs	0.14
1200	1395*420*425	9pcs	0.24
1500	1695*420*425	9pcs	0.3

Distribution Curve (cd)

